

Moving target carrier "CF3.1000D Hi-Speed"

BAUR SA

Corniche 9
CH-2024 St-Aubin-Sauges

Tél. +41 (0) 32 835 16 55
Fax +41 (0) 32 835 34 69
www.baur.ch



IP65

SWISS MADE



Description:

Moving carriers allowing the mounting of up to two "CF3U", "CP91" or "CPF3" targets. Exists in a fixed as well as in a mobile version.

Can be remotely controlled with a CRC4 (radio command unit) or from a central command unit equipped with ciblesCOM (additional functions are then available / WiFi).

Movements:

One way; back and forth; random (position and speed) and movements towards specific positions. The position of the target carrier is defined in real time with a resolution of about 10 cm.

Type of use:

The Baur SA moving target carriers can be used either in a fixed version (Fig. 1-3-4, mounted on a wall or a flat surface) or in a fully mobile version (Fig. 2, tripods).



Installation:

In the tripod version, the Baur SA moving carrier can be installed in less than 2 hours. No terrain adaptation is required.

The length of the mobile carrier can be set from 5m to 50m.

Moving targets:

All Baur SA infantry targets can be used with the target carrier in different configuration (Image 4: 1x CPF3-C + 1x CF3U or Image 1: 1x CPF3-C with Location Of Miss and Hits system (Lomah). The maximum weight to be moved is approx. 43kg. No specific tools required to mount them. Orientation of the target can be set as you wish (exception are target system equipped with LOMAH system)

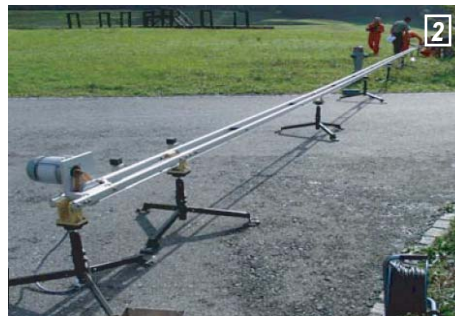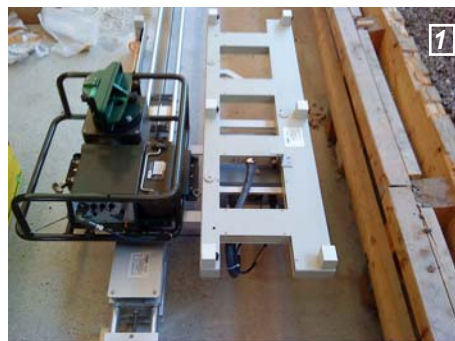

Moving target carrier "CF3.1000D Hi-Speed"

Technical specifications:

Spd^{Max}: 5 m/s or 18 km/h
Acceleration: approx. 1 m to reach Spd^{Max}
Length: 5 à 50 m (3 m increments)
Slope: max. 15°
Charge: approx. 43 kg (1x CPF3-C + 1x CF3U)
Interfaces: WiFi (WLAN 802.11b)
Radio VHF (136-174 MHz)
Radio UHF (403-470 MHz)
Power supply: 230/380 VAC
Duration of life: Our products are built to last 25 years

Key features:

All target parameters can be accessed and modified remotely (target ID, length, radio channel, ...).

Can be controlled by radio (stand-alone, no central command unit required) or in WiFi mode (ciblesCOM software and adequate WiFi coverage required)

Mobile version provides maximum flexibility for installation and use (tripods)

Integration of a location of miss and hits system is possible

Accessoires:



System for location of miss and hits (LOMAH)



CPF3-C Target System



CF3U Target System



Portable Central Command Unit (Tablet PC)

Minimum configuration:

- command unit

Subject to change without notice
© 2011 Baur SA