

Radial and pop-up target "CF"

BAUR SA

Corniche 9
CH-2024 St-Aubin-Sauges

Tel. +41 (0) 32 835 16 55

Fax +41 (0) 32 835 34 69

www.baur.ch

Description:



SWISS MADE



Universal low weight - low size infantry target, stationary or mobile, remotely controlled by radio or WiFi. The "CF" is a rugged target system that can be used outdoors allowing either frontal or lateral movements.

Can be controlled remotely with a CRC4 (radio command unit) or from a central command unit (CCU) equipped with the ciblesCOM software suite (additional functions will then be available).

Type of movement:

Frontal (pop-up) or lateral (scissor) movement depending on type of behaviour required and type of image selected.

(To go from one movement type to another does not require specific tools or modifications to the target system)

Type of use:

Designed to be used with real ammunition as well as with simunition or simulator (laser).

Ammunition:

Designed to be used with ammunition ranging from 5.56 to 12.7 mm caliber.

Target images:

An universal mounting system allows use of wooden, PE or aluminium target images. Custom made target images can also be used.

Accessories:

All our target systems are equipped with an APP connector for use with different accessories (LOMAH, firing system, etc.)



Radial and pop-up target "CF", type CF3U

Technical specifications:

Size:	340 x 310 x 160 mm
Weight:	13.0 kg (16.5 kg with battery)
Movements:	~ 0.5 s (up or down)
Interfaces:	WiFi (WLAN 802.11b) Radio VHF (136-174 MHz) Radio UHF (403-470 MHz)
Power supply:	Battery LiPo 12V/ 30Ah Battery NiCd 12V/ 7Ah
Nr. of cycles (up and down movement) at 20°C:	~5000 (Accu LiPo) ~1000 (Accu NiCd)
Duration of life:	Our products are built to last 25 years
Reliability tests:	Vibration, shock, temperature, EMC



Key features:

No maintenance required. Can stay in the field 365 days/year

All the target parameters can be accessed and modified remotely (target ID, sensitivity, radio channel, etc.)

Can be controlled by radio (stand-alone, no CCU required) or WiFi (ciblesCOM software and WiFi coverage required)

Lateral movement allows a target image to appear from behind a vertical obstacle

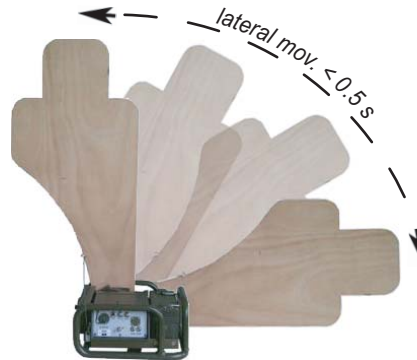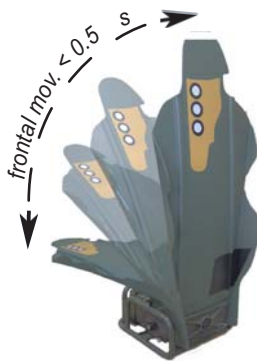

Accessories:



Fixing & mounting system.



Sound generator



LOMAH



CRC4

Minimum configuration:

- compatible command unit